


12AY7/6072

R. F. DOUBLE TRIODE



Base: NOVAL

$U_f = 6,3$ or $12,6$ V
 $I_f = 300$ or 150 mA

Typical Characteristics:


$U_a = 250$ V
 $U_g = -4$ V
 $I_a = 3,0$ mA
 $S = 1,75$ mA/V
 $R_i = 22,8$ k Ω
 $\mu = 40$

Limiting Values:

$U_a = 300$ V
 $U_g = -50$ V
 $W_a = 1,5$ W
 $U_{k/f} = \pm 90$ V
 $I_k = 10$ mA

Capacitances:

	system I.	system II.	
$C_{g/k} =$	1,6	1,6	pF
$C_a =$	0,33	0,33	pF
$C_{g/a} =$	1,7	1,7	pF

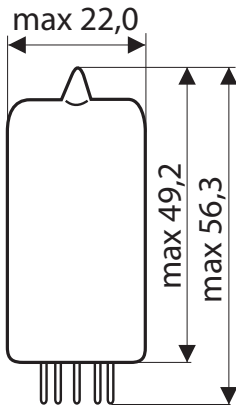

TRANSFER CHARACTERISTICS

PLATE CHARACTERISTICS

